



AM Radio Solutions


DAX-5/6 5 or 6kW AM/IBOC Transmitter



The Harris DAX-5/6 is the first in a dynamic family of 1-6kW AM transmitters designed from the ground up to provide superior IBOC and analog performance. DAX's exceptional linearity and bandwidth will not only deliver the cleanest analog sound in this power range, but also the most accurate reproduction of digital radio signals. Accurate digital signal reproduction with low bit error rate is essential to maximizing digital coverage.

With DAX, Harris — the company that has pioneered every AM modulation standard in use today — introduces a brand new high-efficiency/high-performance modulation technique. Called Digital Adaptive Modulation, this new modulation technology uses a digitally generated AM waveform with DSP based adaptive correction to give the user a high performance transmitter in a cost effective platform. Digital Adaptive Modulation constantly samples the modulated output and dynamically corrects for non-linearity. The result is the cleanest, purest analog or digital (DRM™ or HD Radio™) signal in this power level.

When you combine Digital Adaptive Modulation with redundant “hot-swappable” RF modules, and a number of proprietary features, the result is irresistible: unmatched performance, reliability and cost-effectiveness today plus a “plug-and-play” migration path to digital — all at a competitive price.

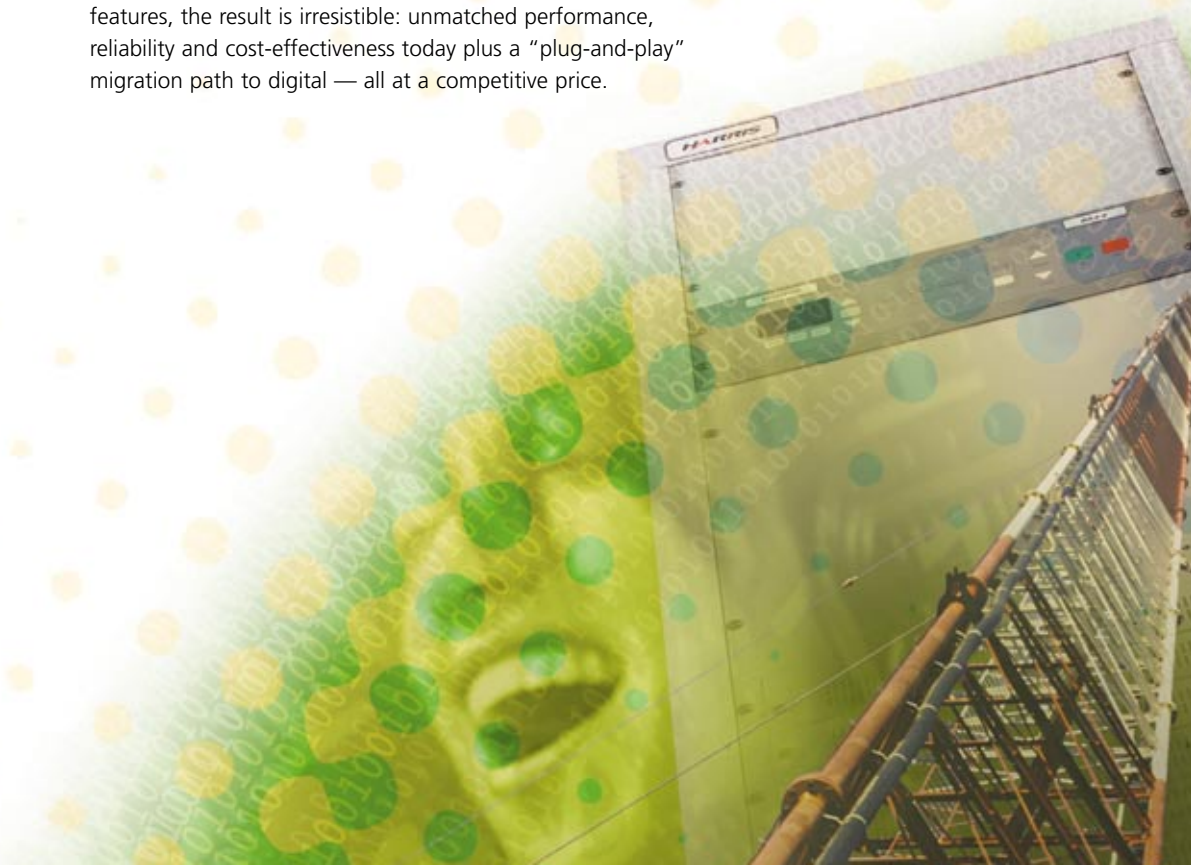



General

Type of Modulation	Harris Digital Adaptive Modulation (Patent pending).
Transmitter Type	Medium Wave, 100% solid state.
Power Output Range	DAX-5: 25w-5.75 kW. DAX-6: 25w-7.0 kW. Five adjustable power levels are provided.
Frequency Range	529 kHz to 1705 kHz. Supplied, tuned, and tested on one frequency as specified. Direct, digital, synthesized (DDS) in 1 kHz steps.
AC Mains Input	Standard: 3-phase 197-251VAC. Optional: 3-phase 380-415VAC, Single phase 220-240VAC, 50/60 Hz.
Power Supply Variation	+5% voltage, +3 Hz frequency for full performance. +10/-15% voltage transmitter operational.
Output Power Regulation	Less than 1% for all power line voltage variations
Transient Protection	Meets ANSI/IEEE C62.41-1980 requirements; includes high energy MOVs.
Frequency Stability	±2 PPM over frequency range and temperature range 0 to 50° C. Higher stability available with external 10 MHz reference. Optional internal precision frequency reference.
Audio Input	-10 to +10 dBm, adjustable transformerless input; 600 and 10k terminators provided.
Dedicated Digital (IBOC/DRM) Input	Magnitude: -10 to +10 dBm; Phase: 2V-20V P-P, remote switchable.
RF Output	7/8" EIA flange, bullet provided.
RF Load	50 ohms, fixed, unbalanced, resistive.
VSWR	1.3:1 for full rated power, no tuning required.
Cabinet & Harmonic /Spurious Radiation	Meets or exceeds FCC, IC, and other world standards.
Overall AC to RF Efficiency	77% or better at rated power output (0 to 100% sinusoidal modulation). 82% typical.
Metering	9 Parameters from front panel. Additional diagnostics and metering through serial interface.
Monitoring and Control	Parallel and serial (VT100) interface.

Audio Performance

Audio Frequency Response	+0.2/-0.8 dB at 90% or 95% modulation, 30 Hz to 10 kHz. Reference: 1 kHz. No audio filter required.
Total Harmonic Distortion+Noise	90% or 95% modulation, 30 Hz to 10 kHz, 5 kW (DAX-5), 6 kW (DAX-6): 0.7% or less; 0.15% typical. 2.25 kW: 0.8% or less 1.25 kW: 1.0% or less 500 w: 1.25% or less
Intermodulation Distortion	1% or less 1:1, 60/7000 Hz; SMPTE at 95% modulation. 1.5% or less 4:1.

Transient Intermodulation Distortion	0.6% or less at 85% modulation, 2.96/8.0 kHz, 4:1. 30 kHz bandwidth.
CCIF Intermodulation Distortion	0.2% or less, 1:1 80/5000, 85% modulation.
Squarewave Overshoot	1% or less, 400 Hz, 70% modulation. (No linear phase filter required).
Squarewave Tilt	0.5% or less at 40 Hz, 70% modulation.
Carrier Shift	Less than 1% at 95% modulation at 1 kHz.
Hum and Noise	-60 dB or better below 100% modulation (unweighted).
Incidental Quadrature Modulation	-38 dB at 1 kHz, 95% modulation; -45 dB typical.
Positive Peak Capability	+145% or greater at 5 kW (DAX-5), 6 kW (DAX-6) audio program modulation, at ±5% mains voltage.
Duty Cycle	Continuous 100% modulated sine wave at rated power.

IBOC/DRM Compatibility

Audio Frequency Response	+0.2/-1.2 dB, 30 Hz to 15 kHz, 90% or 95% modulation, ref 1 kHz.
Audio Total Harmonic Distortion (THD+N)	0.8% or less, 30 Hz to 15 kHz, 90% or 95% modulation.
Group Delay Variation	±3 µs, 200 Hz-15 kHz, ref 1 kHz at 90% or 95% modulation.
J3E Linearity Test	(Single Sideband suppressed carrier) -50 dB, 4/5 kHz equal amplitude tones. -50 dB, 4/5 kHz 5 kHz -1 dB relative to 4 kHz. -65 dB, 5/8 kHz 8 kHz -30 dB relative to 5 kHz.

Service Conditions

Power Consumption	DAX-5 (DAX-6): 6.1 kW (7.3 kW) or less typical at 5 kW (6 kW), 0% modulation; 9.1 kW (11.0 kW) or less typical at 5 kW (6 kW), 100% tone modulation.
Ambient Temperature	0 to 50° C; derate 2° C per 1,000 feet (305 meters) of altitude.
Humidity Range	0 to 95% non-condensing.
Altitude	Up to 13,000 feet (3962 meters).
Size	183 cm H x 59 cm W x 86 cm D (72" H x 23.2" W x 34" D)
Weight	329 KG (725 lbs.)

Notes:

1. All measurements made into test load at rated power, unless otherwise indicated, with adaptive correction circuits enabled.
2. Noise may degrade if AC lines are unbalanced.
3. Audio performance measurements made with standard audio input, no special filters required to obtain these specifications.



Specifications are subject to change. For a complete listing of the most current specifications, please visit our website at www.broadcast.harris.com.



Broadcast Communications Division | 4393 Digital Way | Mason, OH USA 45040
 phone: +1 513-459-3400 | email: broadcast@harris.com | www.broadcast.harris.com

Trademarks and tradenames are the property of their respective companies.

Copyright © 2003 Harris Corporation



Printed in USA on Recyclable Paper HMC 15457 ADV. 1125 8/03